

# Substation planning method in an active distribution network under low-carbon economy

Shaoyun GE<sup>1,2</sup>, Shiju WANG<sup>1,2</sup>, Zhiying LU<sup>1,2</sup>, Hong LIU<sup>1</sup>



**Abstract** A substation planning method that accounts for the widespread introduction of distributed generators (DGs) in a low-carbon economy is proposed. With the proliferation of DGs, the capacity that DGs contribute to the distribution network has become increasingly important. The capacity of a DG is expressed as a capacity credit (CC) that can be evaluated according to the principle that the reliability index is unchanged before and after the introduction of the DG. A method that employs a weighted Voronoi diagram is proposed for substation planning considering CC. A low-carbon evaluation objective function is added to the substation planning model to evaluate the contribution of DGs to a low-carbon economy. A case study is analyzed to demonstrate the practicality of the proposed method.

**Keywords** Substation planning, Capacity credit (CC), Active power distribution network

CrossCheck date: 10 December 2014

Received: 30 September 2014 / Accepted: 23 September 2015 /  
Published online: 20 November 2015

© The Author(s) 2015. This article is published with open access at Springerlink.com

✉ Shiju WANG  
wangsj@tju.edu.cn

Shaoyun GE  
syge@tju.edu.cn

Zhiying LU  
luzy@tju.edu.cn

Hong LIU  
liuhong@tju.edu.cn

<sup>1</sup> Key Laboratory of Power System Simulation and Control, Tianjin University, Ministry of Education, Tianjin 300072, China

<sup>2</sup> Tianjin University, Tianjin 300072, China

## 1 Introduction

The development of a low-carbon economy has world-wide consensus and has been accepted by many countries as an important part of their future development strategy. The power-generation industry, which is the main sector of energy consumption and an important source of CO<sub>2</sub> emissions, will therefore operate the following low-carbon policy [1–7].

To cope with the requirements of a low-carbon economy, and to help provide a reliable and cost-effective power supply, an increasing number of distributed generators (DGs) have been connected to distribution networks around the world. The most common new DG systems are solar photovoltaic (PV) arrays which are seen as means of exploiting climate-friendly renewable energy sources and supporting efficient use of electricity. With the growing penetration of DGs into distribution networks, the power capacity contributed by DGs to networks has noticeably increased.

Traditional substation planning is entirely based on load forecasting, and establishing a balance between substations and loads [8]. However, the power output by DGs can partially supply loads, and therefore the power capacity contributed by DGs to the distribution network cannot be ignored and will affect the planning of substation capacity.

To assess the effect of this capacity substitution on the substation, the concept of the capacity credit (CC) of a DG is proposed. CC is the power capacity that is equivalent to the substation capacity at the same level of reliability, and it can quantify the contribution that DGs make to the power system [9]. The main part of CC assessment is reliability assessment. There are two types of methods of evaluating the reliability of a system having DGs: analytical and simulation methods. An analytical method usually regards a DG as a multi-state conventional generator. Its shortcoming

is its failure to describe the temporal characteristics of distributed generation, resulting in inaccurate estimation of the power output. The main simulation method is the sequential Monte Carlo method [10]. This method not only describes the temporal output of the distributed power generation but also calculates reliability indices of frequency and duration, and is thus extensively applied.

This paper proposes a CC assessment method employing the sequential Monte Carlo method and considering power failure and DG output. Furthermore, a planning method for a substation in an active distribution network is proposed. In the process of planning optimization, the CC of a DG is included in the substation capacity. This allows a reduction in the capacity of and investment in traditional substations. This train of thought is in line with the principles of a low-carbon economy.

## 2 Substation planning model for an active distribution network

The traditional substation planning problem can be described as follows. After load forecasting for the target year, the number, capacities, locations and power supply ranges of substations can be optimized using the objective function of the minimum cost of substations, network investment and annual operating costs. This problem is stated mathematically as:

$$\begin{cases} \min C = C_1 + C_2 + C_3 \\ C_1 = \sum_{i=1}^n \left[ f(s) \frac{r_0(1+r_0)m_s}{(1+r_0)m_s - 1} + u(S_i) \right] \\ C_2 = \alpha \left[ \frac{r_0(1+r_0)m_s}{(1+r_0)m_s - 1} \right] \sum_{i=1}^n \sum_{k \in J_i} l_{ik} \\ C_3 = \beta \sum_{i=1}^n \sum_{k \in J_i} P_{ik}^2 l_{ik} \\ \text{s.t. } \sum_{k \in J_i} P_{ik} \leq S_i \gamma_i \cos \varphi, \quad i = 1, 2, \dots, N \\ J_1 \cup J_2 \cup \dots \cup J_N = J \\ l_{ik} \leq R_i \end{cases} \quad (1)$$

where  $C_1$  is the construction and operation costs of the substations;  $C_2$  the construction cost of the lines;  $C_3$  the network loss cost;  $N$  the total number of existing and newly constructed substations;  $n$  the number of newly constructed substations;  $f(s)$  the construction cost of substation  $i$ ;  $u(S_i)$  the operation cost of newly constructed substation  $i$ ;  $S_i$  the capacity of substation  $i$ ;  $\gamma_i$  the load rate of substation  $i$ ;  $J_i$  the load collection carried by substation  $i$ ;  $J$  the collection of all load points;  $l_{ik}$  the length of feeder  $k$  added from substation  $i$ ;  $P_{ik}$  the load (active power) carried by feeder

$k$  of substation  $i$ ;  $m_s$  the depreciation years of the substations;  $m_1$  the depreciation years of the low-voltage sides of substations;  $r_0$  the discount rate;  $\cos \varphi$  the power factor;  $R_i$  the limit of the power supply radius of substation  $i$ ; and  $\alpha$  the investment cost per unit length of the feeder. Additionally,  $\beta$  is the feeder loss conversion factor expressed as:

$$\beta = \frac{\beta_1 \beta_2 \beta_3}{U^2 \cos \varphi}$$

where  $\beta_1$  is the line resistance per unit length;  $\beta_2$  the unit energy consumption discount factor;  $\beta_3$  the line loss hours per year; and  $U$  the line voltage on the low-voltage side of a substation.

After DGs are connected to the grid, the costs of the lines and network loss between substations and DGs are added to the objective function:

$$C_2 = \alpha \left[ \frac{r_0(1+r_0)m^1}{(1+r_0)m^1 - 1} \right] \sum_{i=1}^N \left( \sum_{k \in J_i} l_{ik} + \sum_{d \in D_i} l_{id} \right) \quad (2)$$

$$C_3 = \sum_{i=1}^N \left( \beta \sum_{k \in J_i} P_{ik}^2 l_{ik} + \beta_d \sum_{d \in D_i} P_{id}^2 l_{id} \right) \quad (3)$$

where  $\beta_d = \beta_{1d} \beta_{2d} \beta_{3d} / U^2 \cos \varphi$  is the loss conversion factor of the contact line between a substation and DG;  $\beta_{1d}$  the line resistance per unit length;  $\beta_{2d}$  the unit energy consumption discount factor;  $\beta_{3d}$  the line loss hours per year;  $D_i$  the set of DGs in the  $i^{\text{th}}$  substation's power supply range; and  $l_{id}$  the length of contact line  $d$  from substation  $i$  to the  $d^{\text{th}}$  DG.

Two constraint conditions are added:

$$\begin{aligned} rel_{fol}(i) &\geq rel_{pre}(i), \quad i = 1, 2, \dots, N \\ \sum_{j \in J_i} P_j &\leq S'_i \cos \varphi + CC_{PV}(i) + CC_{WTG}(i) \quad i = 1, 2, \dots, N \end{aligned} \quad (4)$$

where  $rel_{fol}(i)$  is the reliability index after DGs are introduced in the power supply range of the  $i^{\text{th}}$  substation;  $rel_{pre}(i)$  the reliability index after DGs are introduced in the power supply range of the  $i^{\text{th}}$  substation;  $CC_{PV}(i)$  the CC of PV power in the power supply range of the  $i^{\text{th}}$  substation;  $CC_{WTG}(i)$  the CC of wind power in the power supply range of the  $i^{\text{th}}$  substation; and  $S'_i$  the optimized capacity of the  $i^{\text{th}}$  substation.

The optimization model for substation planning in a low-carbon economy takes the overall cost in the planning period as the objective function to minimize. To evaluate the effect on the low-carbon economy, two components are added to the objective function: ①  $C_4$  is the annual variable operation fee, or the increased cost of fossil fuel and CO<sub>2</sub> emissions resulting from transmission loss, and ②  $C_5$  is the



cost of water and wind spillage due to transmission capacity deficiency, which is measured through the increased indirect cost of fossil fuel and CO<sub>2</sub> emissions [11–13]. The objective function can be formulated as:

$$\min C = C_1 + C_2 + C_3 + C_4 + C_5 \quad (6)$$

$$C_4 = \sum_{i=1}^{N_L} P_{loss,i} T_{ave} (\sigma_F^{ave} K_F + \sigma_C^{ave} K_C) \quad (7)$$

$$C_5 = (P_{Awi} + P_{Awa}) T_{ave} (\sigma_F^{ave} K_F + \sigma_C^{ave} K_C) \quad (8)$$

where  $P_{loss,i}$  (MW) is the transmission power loss of candidate line  $i$ ;  $T_{ave}$  the annual average of the number of utilization hours;  $\sigma_F^{ave}$  (tce/MWh) the average fuel consumption intensity of units in the planning system;  $\sigma_C^{ave}$  (t CO<sub>2</sub>/MWh) the average CO<sub>2</sub> emission intensity of units in the planning system;  $K_F$  (¥/tce) the fuel price in the planning system;  $K_C$  (¥/tCO<sub>2</sub>) the unit cost of CO<sub>2</sub> emission mitigation using low-carbon technology, CDM or ET transaction price or the penalty for exceeding an emission allowance; and  $P_{Awi}$ ,  $P_{Awa}$  (MW) the wind and hydro power spillage due to transmission capacity deficiency.

### 3 Capacity credit

#### 3.1 Definition of the CC of a DG

The reliability of a power system refers to the ability to continuously provide customers electric power of high quality. This ability is usually expressed as probability, and the high quality refers to the frequency and voltage being in certain ranges. The reliability of power systems has often been measured using reliability indices [14]. Reliability improves with the addition of new generating units but reduces when the electric power load increases. The concept of the effective load carrying capability (ELCC) of new additional generating units refers to the extra load that can be served by these generating units while maintaining the system reliability at a designated level [15–17]. This designated level is usually the loss of load expectation (LOLE) of the power system before the new additional generating units are integrated. The concept of the ELCC can be expressed as [18]:

$$F(C, L) = F(C + \Delta C, L + \Delta L) \quad (9)$$

where  $\Delta L$  is the extra load that can be served by the generating units providing additional capacity  $\Delta C$ , and  $F$  is calculation function of ELCC. Under general conditions,  $\Delta C \neq \Delta L$  owing to possible system outages caused by failures of generating units and transmission lines.

The same  $\Delta L$  served by different types of generating units such as traditional thermal power plants and DGs at

the same designated reliability level results in different installed capacities. For example an extra load of  $\Delta L = 100$  MW could be served by a 300 MW DG or a 120 MW traditional thermal power plant, according to their different levels of availability. If the integration of a 300 MW DG and the integration of a 120-MW traditional thermal power plant provide the same reliability in meeting the load demand of  $L + \Delta L$ , then (1) can be rewritten as:

$$F(C, L) = F(C + \Delta C_1, L + \Delta L) = F(C + \Delta C_2, L + \Delta L) \quad (10)$$

where  $\Delta C_1$  and  $\Delta C_2$  are the capacities of different generating units.

Figure 1 shows a curve of the relationship between the reliability level, measured as the probability of an outage, and the typical load demand. The system load is presumed to have the same overall variability regardless of the load level. Changes in system load are represented by increments of a percentage of the typical peak load and can be calculated according to:

$$L_{ci} = L \pm i \cdot c \cdot L_{pk} \quad (i = 0, 1, 2, \dots, n) \quad (11)$$

As shown in Fig. 1, the curve for the original system (before the addition of generating units) is modified in different ways by the addition of thermal power plants or the addition of DGs. The dashed line  $R$  indicates the reliability of the original system and intersects with the curves for the original system and the curves for the system modified by the addition of thermal power plants or DGs; the distance between the points of intersection is  $\Delta L$  which is the increase in ELCC at reliability level  $R$ .

The CC of a DG can be defined according to the concept of the ELCC as follows. Under the condition of maintaining a designated reliability level, the extra load demand that can be served by the addition of a DG could also be

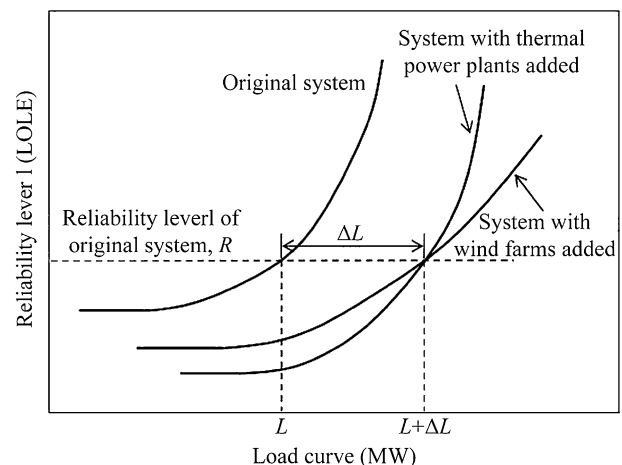


Fig. 1 Relationship between the reliability level and load

served by the installation of a thermal power plant with a certain capacity. The ratio of the extra load demand  $\Delta L$  capacity to the capacity of the newly installed DG is the CC of the DG. This is expressed as:

$$C_C = \frac{\Delta L}{C_D} \times 100\% \quad (12)$$


where  $C_C$  is the installed capacity of an ideal thermal power plant that can serve the same  $\Delta L$  as a DG with capacity  $C_D$ .

### 3.2 Calculations of the CC of DGs

According to the concept of the CC of DGs,  $\Delta L$  is the unknown variable that we should calculate. If the installed capacity of newly added DGs is  $C_D$ , then theoretically, the maximum  $\Delta L$  is  $C_D$ . According to Fig. 1,  $\Delta L$  is the load demand of the power system after the addition of new DGs minus the typical load demand, and the result should be in the interval  $[L, L + \Delta L]$ . Non-sequential Monte-Carlo simulation can easily compute reliability indices from different load curves, but the reverse calculation is very difficult. Because the relationship between the reliability level and load demand increases monotonically, the reverse calculation can be made by employing secants [19], as shown in Fig. 2.

The calculation steps are as follows.

Step 1: If the peak load of a typical load curve is  $L_{pk0}$  and the deviation is  $\varepsilon$ , compute the reliability index of the original system with load  $L$ , the reliability index of the system having added DGs of capacity  $C_D$  with load  $L$ , and the reliability index of the system having added DGs of capacity  $C_D$  with load  $L + C_D$  to obtain  $R$ ,  $R_1$  and  $R_2$  respectively.

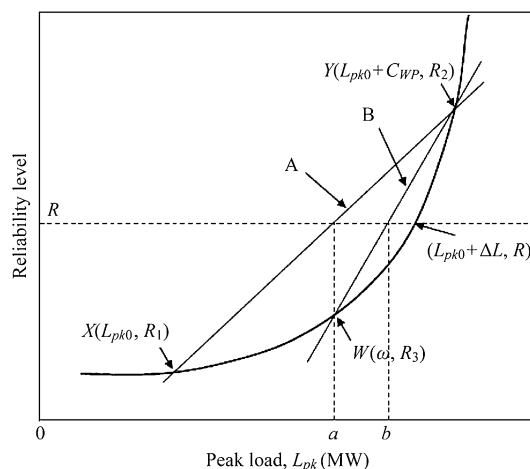

**Fig. 2** Relationship between the reliability level and peak load showing how the secant approach is used


Step 2: Compute the abscissa  $a$  of the intersection point of line  $A$ , which passes through points  $X(L_{pk0}, R_1)$  and  $Y(L_{pk0} + C_D, R_2)$ , and line  $R$ , and conduct a non-sequential Monte-Carlo simulation with new load curve  $L_{ci1} = L + a - L_{pk0}$  to calculate the reliability index  $R_3$ .

Step 3: If  $|R_3 - R| > \varepsilon$ , compute the abscissa  $b$  of the intersection point of line  $B$ , which passes through points  $W(a, R_3)$  and  $Y(L_{pk0} + C_D, R_2)$ , and line  $R$ , and conduct a non-sequential Monte-Carlo simulation with new load curve  $L_{ci2} = L + b - L_{pk0}$  to calculate the reliability index  $R_4$ .

Step 4: Continue iteratively until  $|R_4 - R| < \varepsilon$ , and then find  $\Delta L$ , which is equal to the CC of the DG.

### 4 Substation planning method for an active power distribution network

Traditional planning of a substation takes the substation siting to meet “ $N - 1$ ” load rate criteria as the main constraint. However, the large-scale implementation of DGs provides not only power for local use but also, at times of low load, surplus power that can be fed to the distribution network. Thus, in the planning of a substation site, if the power of DGs in the area is not taken into account, there will be an inevitable and unreasonable waste of the substation capacity, leading a poor return on investment. Therefore, from the viewpoint of reliability, this article

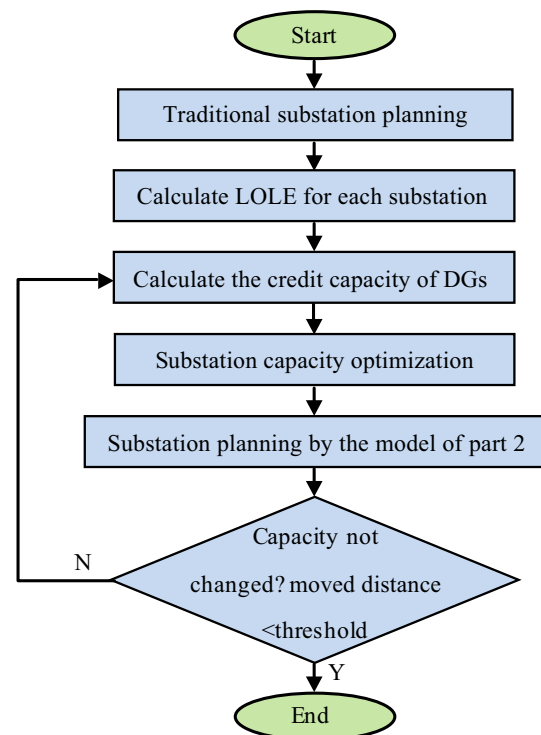


**Fig. 3** Flowchart of the proposed method of substation planning




**Table 1** Fault parameters

	Average failure rate (times/year)	Average fault time (hours/time)
Turbine	4.600	15
Solar	3.000	20
One transformer fault	0.100	6
Two transformers fault	0.030	10
Three transformers fault	0.001	30

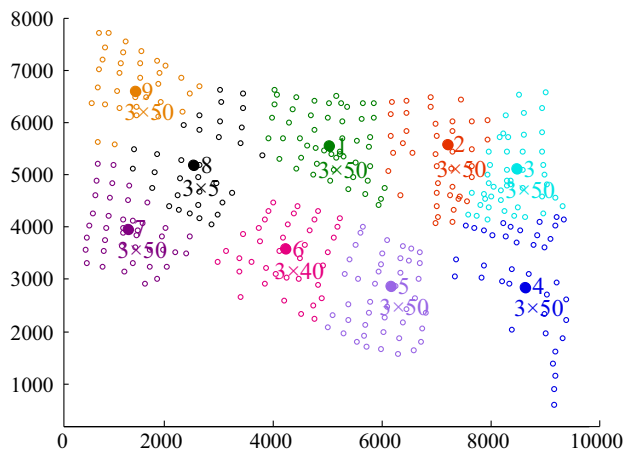**Fig. 4** Substation planning using the traditional method**Table 2** Planning result obtained using the traditional method without consideration of DGs

No.	Capacity (MW)	Loads (MW)	LOLE (MW)
1#	3 × 50	88.800	31.088
2#	3 × 50	82.730	28.963
3#	3 × 50	87.709	30.706
4#	3 × 50	81.896	28.671
5#	3 × 50	105.322	36.872
6#	3 × 40	75.777	26.529
7#	3 × 50	77.496	27.131
8#	3 × 50	73.106	25.594
9#	3 × 50	71.612	25.071

considers substation failure and DG power, and analyzes the timing characteristics and fault conditions of DG power. According to the theory of the CC of a DG within the scope of a substation described in the previous section, and using a substation locating and sizing algorithm that employs a weighted Voronoi diagram, a method is established for the planning of a substation site in the presence of DGs. In this paper, we choose the LOLE as the

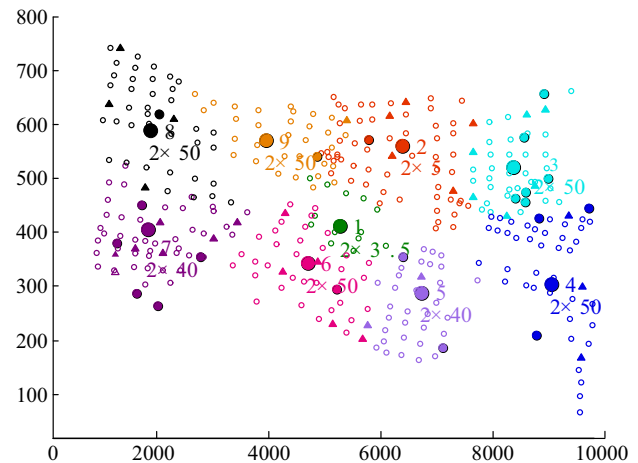**Fig. 5** Substation planning with consideration of DGs

reliability parameter. The specific steps of the proposed method are as follows.

Step 1: Without considering the operation of the DG and by employing the weighted Voronoi diagram algorithm for traditional substation planning in an area, obtain the capacity and power range for each substation.

Step 2: Calculate the reliability index LOLE accounting for the power supply range of each substation.

Step 3: Calculate the reliability index LOLE after the introduction of the DGs, and then calculate the CC of the DGs for the power supply range of each substation.

Step 4: Optimize the substation capacity. If a new substation satisfies the condition  $S_i \cos \varphi \leq S_{dXi} \cos \varphi + CC_D(i)$ , then it is treated as a substation with capacity  $S_{dXi}$ , where  $S_i$  is the capacity of the  $i^{\text{th}}$  substation,  $\cos \varphi$  is the power factor,  $CC_D(i)$  is the sum of CCs of all DGs, and  $S_{dXi}$  is the optional capacity at the next level.

Step 5: Update the capacity of each substation. Sum the active power and CC of the DGs as the actual active power. Carry out substation planning using the model in section 2.

Step 6: If the sum of the distances moved by all substations is less than the threshold value and the substation capacity does not change, then go to step 7; otherwise go to step 3.

Step 7: Output the result comprising each substation's location, capacity, power supply range and cost.

The flow chart is as Fig. 3.

## 5 Case study

The proposed method of substation planning is applied to a case study in which a district covers an area of 63.08 km<sup>2</sup>. This area is divided into 368 blocks for load



**Table 3** Planning result obtained using the proposed method

No.	Capacity (MW)	Loads (MW)	Solar (MW)	Wind turbine	LOLE	Credit capacity (MW)	Capacity credit (%)
1#	2 × 40	55.275	0	13	19.351	1.360	31.23
2#	3 × 40	83.072	105.0	60	28.083	36.634	29.28
3#	2 × 50	95.521	128.0	15	30.738	9.674	7.27
4#	2 × 50	109.594	102.0	52	27.425	17.131	14.34
5#	2 × 50	90.048	57.0	68	31.525	11.702	14.66
6#	2 × 50	85.802	140.0	13	26.102	14.907	10.33
7#	2 × 50	76.271	72.5	128	26.702	25.555	22.15
8#	2 × 50	80.266	65.0	33	25.100	18.753	24.65
9#	2 × 50	68.602	65.0	33	24.017	24.361	32.03

forecasting. The target planning year is 20 years from the present. The total load in the target year is 744.5 MW. The area is a new planning area with no existing substations. There are four options for the substation capacity: 2 × 31.5 MVA, 2 × 40 MVA, 2 × 50 MVA, 3 × 40 MVA, and 3 × 50 MVA. The high-voltage side of the substation is 110 kV and the power factor is assumed to be 0.9.

The forecast installed capacity of solar power in the target planning year is 734.5 MW. The forecast number of wind turbines is 415, and the installed capacity of each turbine is 335 kW. The starting, rated, and cut-out wind speeds of a turbine are 2.5, 12.5 and 25 m/s, respectively. The number of years simulated for Monte Carlo analysis is 100000 to ensure that enough contingency events are encountered. The fault parameters of components are given in Table 1.

The result of substation planning using the traditional method without consideration of DGs is shown in Fig. 4. Hollow dots represent loads, solid dots represent substations, and numbers are the serial numbers and capacities (MW) of the substations. The planning result is presented in Table 2.

The result of substation planning obtained using the proposed method with consideration of DGs is shown in Fig. 5. Triangles represent solar power and small solid dots represent wind turbines. The planning result is presented in Table 3.

It is seen that the total capacity of all substations reduces, but the LOLE of each substation does not increase. The total costs of the substations planned using the traditional method and proposed method are 11.012 and 7.352 billion RMB, respectively. It can thus be concluded that ① the DGs clearly contributed power capacity to the substations and ② in traditional substation planning, the margin of a substation's capacity is too large, leading to a poor return on investment.

## 6 Conclusion

A substation planning method that accounts for the introduction of large-scale DGs was proposed on the basis of the assessment of the CC of DGs. the LOLE reliability parameter was used to determine whether the substation capacity is reasonable, and the capacity was reduced as much as possible while maintaining the same reliability, in an effort to meet the targets of low carbon emissions and low cost. The main contributions of the paper are as follows.

- 1) Starting from the viewpoint of reliability and considering substation faults and a distributed power supply, an integrated substation planning method with an objective function that strives for a low-carbon economy was proposed.
- 2) In accordance with the principle of invariant reliability, a method of evaluating the CC of a DG was proposed to measure the effective load carrying capacity that the DG contributes to the distribution network.
- 3) The method was verified by comparison with the traditional method for planning substations.

This research is only a preliminary exploration and much follow-up work is required; e.g., studies that consider energy storage and studies that classify load types.

**Acknowledgments** This work was supported by the National Natural Science Foundation of China (No. 51477116).

**Open Access** This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.



## References

- [1] Chen QX, Kang CQ, Xia Q et al (2010) Power generation expansion planning model towards low-carbon economy and its application in China. *IEEE Trans Power Syst* 25(2): 1117–1125
- [2] Sirikum J, Techanisawad A, Kachitvichyanukul V (2007) A new efficient GA-benders' decomposition method: for power generation expansion planning with emission controls. *IEEE Trans Power Syst* 22(3):1092–1100
- [3] Wu YW, Lou SH, Lu SY (2011) A model for power system interconnection planning under low-carbon economy with CO<sub>2</sub> emission constraints. *IEEE Trans Sustain Energy* 2(3):205–214
- [4] Kazerooni AK, Mutale J (2010) Transmission network planning under security and environmental constraints. *IEEE Trans Power Syst* 25(2):1169–1178
- [5] Ding R, Kang CH, Zhou TR et al (2011) Analysis and prospect on technical approaches for low-carbon power grid. *Power Syst Technol* 35(10):1–8 (in Chinese)
- [6] Zhou ZY, Liu Y, Jin CP (2009) Study on construction of low-carbon featured chlor-alkali industry bases energized by non-grid-connected wind power in offshore Jiangsu province. In: *Proceedings of the 1st world non-grid-connected wind power and energy conference (WNWEC'09)*, Nanjing, China, 24–26 Sept 2009, pp 430–433
- [7] Fleishman LA, de Bruin WB, Morgan MG (2010) Informed public preferences for electricity portfolios with CCS and other low-carbon technologies. *Risk Anal* 30(9):1399–1410
- [8] Wang SJ, Lu ZY, Ge SY et al (2014) An improved substation locating and sizing method based on the weighted Voronoi diagram and the transportation model. *J Appl Math*. ID810607/1-9
- [9] Voorspools KR, D'haeseleer WD (2006) An analytical formula for the capacity credit of wind power. *Renew Energy* 31(1):45–54
- [10] Pudaruth GR, Li FR (2009) Locational capacity credit evaluation. *IEEE Trans Power Syst* 24(2):1072–1079
- [11] Kang CQ, Zhou TR, Chen QX et al (2009) Assessment model on low-carbon effects of power grid and its application. *Power Syst Technol* 33(17):1–7 (in Chinese)
- [12] Jia WZ, Kang CQ, Liu CY et al (2011) Capability of smart grid to promote low-carbon development and its benefits evaluation model. *Autom Electr Power Syst* 35(1):7–12 (in Chinese)
- [13] Chen QX, Kang CQ, Xia Q et al (2010) Mechanism and modeling approach to low-carbon power dispatch. *Autom Electr Power Syst* 34(12):18–23 (in Chinese)
- [14] Wang C, Xu Z, Gao P et al (2007) Reliability index framework for reliability evaluation of bulk power system. *Proc CSU-EPSSA* 19(1):42–48
- [15] Keane A, Milligan M, Dent CJ et al (2011) Capacity value of wind power. *IEEE Trans Power Syst* 26(2):564–572
- [16] Electricity Networks Association (2006) Engineering Technical Report
- [17] Dent C, Zachary S (2012) Capacity value of additional generation: probability theory and sampling uncertainty. In: *Proceedings of the 12th international conference of probabilistic methods applied to power systems (PMAPS'12)*, Istanbul, Turkey, 10–14 Jun 2012, 6 pp
- [18] D'Annunzio C, Santoso S (2008) Analysis of a wind farm's capacity value using a non-iterative method. In: *Proceedings of the IEEE Power and Energy Society general meeting: conversion and delivery of electrical energy in the 21st century*, Pittsburgh, PA, USA, 20–24 Jul 2008, 8 pp
- [19] Keane A, Milligan M, Dent CJ et al (2011) Capacity value of wind power. *IEEE Trans Power Syst* 26(2):564–572

**Shaoyun GE** received his Ph.D. degree in electrical engineering from Hong Kong Polytechnic University in 1998. He is now a Professor at the School of Electrical Engineering of Tianjin University, China. His research interests include urban power system planning, the optimal operation and control of power systems, and smart grids.

**Shiju WANG** received his B.S. degree in 2010 and is currently pursuing an M.S. degree at the School of Electrical Engineering at Tianjin University, China. His research interest includes urban power network planning.

**Zhiying LU** received her Ph.D. degree from the School of Electrical Engineering at Tianjin University, China. She is an Associate Professor at Tianjin University. Her research interests include intelligent algorithms, data mining, and power system planning.

**Hong LIU** received his M.S. degree in 2009 at the School of Electrical Engineering at Tianjin University, China. His research interests include urbanpower system planning, the optimal operation and control of power systems, and smart grids.